

Product Information

S7-Panel-PLC

PC350V

PC350P



(valid from version PC350x-xxx-03)

Description

Panel-PLC with **TFT-colour touch panel** in 4 models

- **PC350V/P**
3,5" TFT (320x240 pixel)

Standard configuration:

- **RS232 with**
 - free ASCII-protocol
- **RS485 with**
 - free ASCII-protocol
 - Modbus RTU
 - with switchable terminate resistors for RS485
- **Ethernet with**
 - RFC1006,
 - Send/ Receive via TCP and UDP,
 - Modbus TCP
- **CAN with**
 - protocol compatible to CANopen®
 - layer2-communication
 - with switchable terminate resistors for CAN

• **Micro-SD-slot**
- for SD-cards up to 8GByte

• **Run/Stop-switch**

• **Status LEDs** for Power, Battery, Error, Run

• **Inserting stripes** for Logo and identification (thereby customized adaption possible easy)

optional configuration:

- (optional)
- **Profibus DP-Master**
- **Profibus DP-Slave**
- with switchable terminate resistors for Profibus

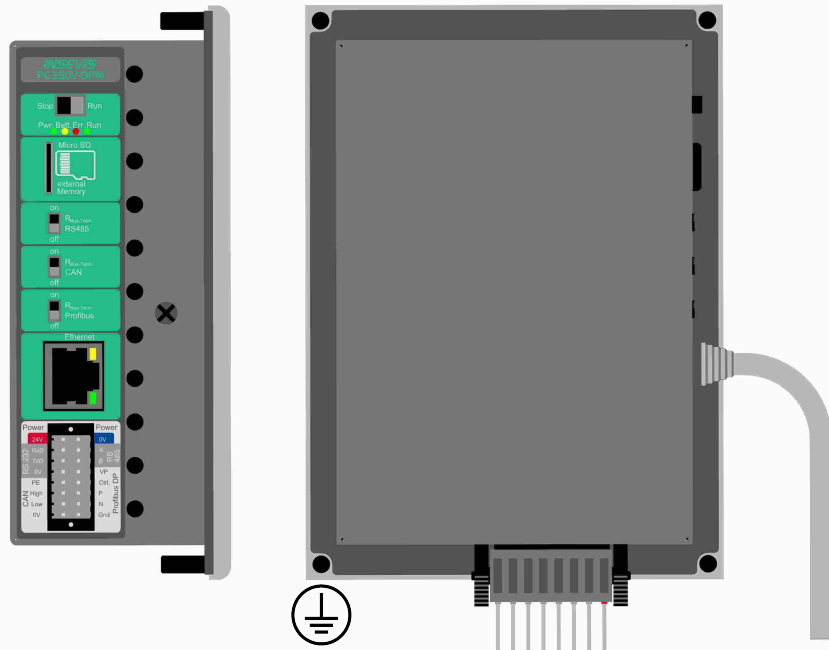


Figure above: Panel-PLC PC350V, rear view and view from the side

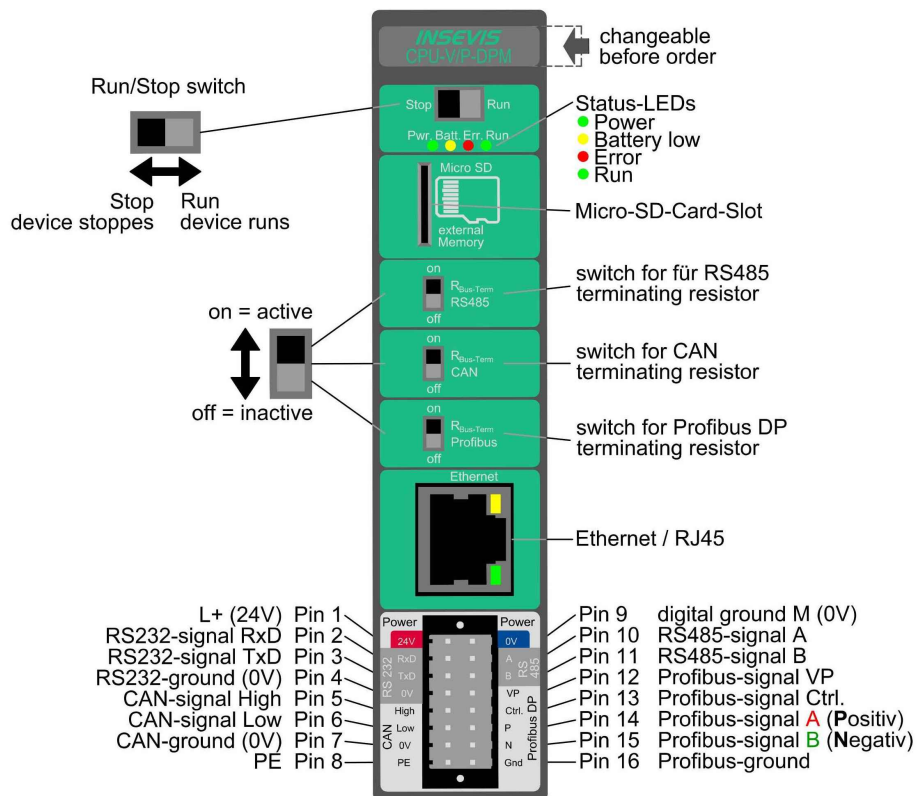


Figure above: Identification of all CPUs of all Panel-PLCs basic devices with CPU ValueLine and with Profibus DP Master

Technical data	Device	
Dimensions W x H x D (mm) Cut out W x H (mm) Weight	132 x 96 x 49 118 x 89 ca. 450 g	
Operating temperature range Storage temperature range	-20°C ... +60°C (without condensation) -30°C ... +80°C	
IP-protection class front panel rear side	IP65 IP41	
Connection technology	unlockable connector with self-lock and 2 lift-arms (cage clamp technology) for cross section up to max. 1mm ²	
Load voltage L+	24V DC (11 V ... 30V DC)	
Current consumption Power dissipation	20 mA ... 350 mA 1,5 W (typ.), 4,2 W (max.)	
Start-up current	< 3A	
Diagonal of display (inch) Display resolution (pixel)	3,5" (89mm) 320x240 pixel (QVGA)	
Display unit Operating unit	TFT display with 16Bit colours analog resistive touch screen	
Visualization software Reference unit	VisuStage PC350	
Technical data	CPUs	
CPU-Typ	ValueLine (PC350V)	PowerLine (PC350P)
Working memory = battery backed load memory Diagnostic buffer	512kB, thereof 256 kByte remanent data 100 messages (all remanent)	640kB, thereof 384 kByte remanent data 100 messages (all remanent)
Flash internal - for visualization external memory	4 MByte Micro SD, up to max. 8 GByte	24 MByte Micro SD, up to max. 8 GByte
Program language Program system	STEP 7® - AWL, KOP, FUP, S7-SCL, S7-Graph from SIEMENS SIMATIC® Manager from SIEMENS or compatible products	
Operating system Program unit to reference	compatible to S7-300® from SIEMENS CPU 315-2PNDP	
Seriell interfaces (protocols)	COM1: RS 232 (free ASCII) COM2: RS 485 (free ASCII, Modbus-RTU)	
Ethernet (protocols)	Ethernet: 10/100 Mbit with CP343 functionality (RFC1006, TCP, UDP, Modbus-TCP)	
CAN (protocols)	CAN-Telegramms (Layer 2), kompatibel to CANopen® MasterSlave 10 kBaud ... 1 MBaud	
Profibus (protocols)	Profibus DP V0 master/ slave 9,6kBaud ... 12 MBaud	
Onboard periphery	none	
Decentral periphery	<ul style="list-style-type: none"> - INSEVIS- Periphery (with automatic configuration via „ConfigStage“) - all CANopen® Slaves according to DS401 - all Profibus DP-V0-Slaves - diverse external periphery families 	

Control panel cut out

Dimensions


Cut out
W x H (mm) 118 x 84
4 holes with D 4,5mm

Mounting depth
ca. 49mm max.

Wiring outlet

- RJ45 to the top
- 2x16 connector to the right
(rear view and horizontal mounting)

- RJ45 to the right
- 2x16 connector to the bottom
(rear view and vertical mounting)

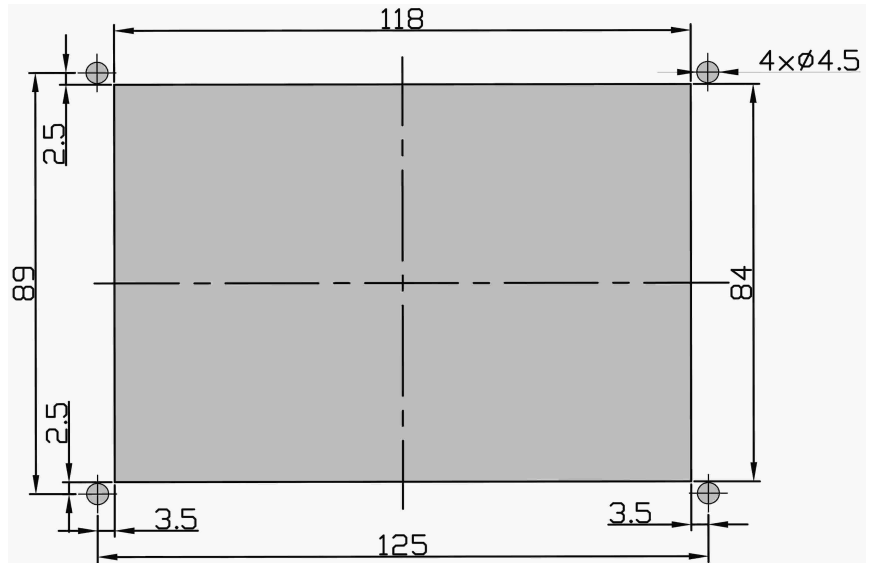

Documentation and samples



Internet: www.insevis.de

Box: Products / Panel-PLC
Download: TI-PC xxxx.pdf

Box: Documentation
Download: Manual Panel-PLC.pdf



Internet: www.insevis.de

Box: Service
Panel-PLC

INSEVIS provides sample programs for each function, well documented for free download

Ordering data devices

Identification	Standard	with Profibus DP Master	with Profibus DP Slave
S7-Panel-PLC PC350V	PC350V-0-03	PC350V-DPM-03	PC350V-DPS-03
S7-Panel-PLC PC350P	PC350P-0-03	PC350P-DPM-03	PC350P-DPS-03

Ordering data accessoires

Identification / Order-No.	Identification / Order-No.
Connector 2x8pin (for PLC) / E-CON16-00	VA- Drill jig for 3,5"-devices, stainless steel / E-DRL35-00
Mounting set for 3,5"-devices * / E-MNT35-00 (PU10 pcs.)	
Micro SD-card 1GB (external memory) / E-MSD1-00	Micro SD-card 4GB (external memory) / E-MSD4-00
Micro SD-card 2GB (external memory) / E-MSD2-00	Micro SD-card 8GB (external memory) / E-MSD8-00
3D-doming label with custom logo for front side (PU100 pcs.)	Inserting stripe H for logo and identification for rear side (PU100 pcs.)
OEM-Firmware with customized logo included / SW-BS-OEM	Profibus-adapter for 12MBaud-nets / E-AD-DP12

* (1x already part of first deliveries scope)

Copyright

This and all other documentation and software, supplied or hosted on INSEVIS web sites to download are copyrighted. Any duplicating of these data in any way without express approval by INSEVIS GmbH is not permitted. All property and copy rights of these documentation and software and every copy of it are reserved to INSEVIS GmbH.

Trade Marks

INSEVIS refers that all trade marks of particular companies used in own documentation are reserved trade marks are property of the particular owners and are subjected to common protection of trade marks.

Disclaimer

All technical details in this documentation were created by INSEVIS with highest diligence. Anyhow mistakes could not be excluded, so no responsibility is taken by INSEVIS for the complete correctness of this information. This documentation will reviewed regularly and necessary corrections will be done in next version. With publication of this catalog all other versions are no longer valid.