

● Characteristics

1500 - RTD - THERMOMETER - MODULAR - ECONOMIC



- Input:	RTD Pt100 (maximum range -50...+250 °C)
- Output:	4...20 mA current loop HART (2-wire)
- Voltage supply:	out of current loop (12...40 VDC)
- Accuracy:	see technical details
- Process connection:	several options
- Electrical connection:	several plugs
- Temperature range:	-20...+80 °C (ambient)
- Limit value contacts:	2 electronically (NPN / PNP)
- Adjustment:	keys / software
- Material:	stainless steel 1.5471 (medium contact)
- Protection:	at least IP65

● Technical data

Input

Sensor RTD Pt100: -50...250 °C (minimum range: 50°C)

Output

Current signal: 4...20 mA with superimposed communication signal (HART), 2-wire current loop

Current range: 3,6...21 mA

Signal on error: 21 mA (sensor break, sensor open circuit, Sensor short circuit, underflow)

Performance

Sensor:	RTD Pt100:	Class A / Class B / Class AA (B1/3 DIN)
Measuring amplifier:	Accuracy:	0,3% of range
	Resolution:	16 Bit
	Filter setting:	0...99 s
	Measuring rate:	10 measurements/s
	Configuration:	Keys on display / via software (HART communication)
Transmission behaviour:	Transmission behaviour:	temperature linear
	Turn-on delay time:	<5 s
	Indicator / limit values:	Resolution: -9999...9999 digit
Error of measurement:	Error of measurement:	±0,2% of range, ±1 digit
	Temperature drift:	100 ppm/K
	Features:	according VDMA 24574-1 up to 24574-4
	Operation:	according VDMA 24574-1 up to 24574-4

Programmable features

Measuring amplifier: Measuring range start (LRV) / Measuring range end (URV) / Adjustment, simulation of output current / Filter function

Display: Linear output signal / HART address / 2-point calibration range of indication / time of indication / decimal point / units / stabilisation of zero point / locking of programming / calibration points / TAG number

Limit value contacts: limit value 1 and 2 / hysteresis 1 and 2 / delay times 1 and 2

● Applications

For use in climating, ventilating and heating installations and the whole range of industrial application. With it's two configurable limit value contacts, the integrated display and the numerous electrical connections, the temperature sensor is also suitable for applications with higher requirements.



● Technical data (continued)

Indication

Display:	7 segment, 8,5 mm, red, 4 digits, representation mirror-inverted 180° possible
Head of display:	rotatable approx. 330°
Memory:	minimum / maximum values
Indication:	- measuring value - unit of measurement - control menu
Decimal point:	automatically or manually, dependent on measuring range / unit
	Representation: xxxx / xxx.x / xx.xx / x.xxx

Limit contacts

Electronically:	2x PNP or NPN (30 VDC, 200 mA) Option: 2x PNP or NPN (30 VDC, 1000 mA)
Indication:	1 LED red for each limit value
Voltage across:	<1 V
Settings:	with 3 keys (TouchM-Technology)
Setting range:	switch point and hysteresis: any value within measuring range
Switching delay:	0,0...999,9 s
Failsafe function:	adjustable
Galvanical insulation:	switching outputs are separated from measuring amplifier

Supply

Voltage:	HART current loop: 12...40 VDC VDC
Load:	$R = (U_B - 12 \text{ V}) / 21 \text{ mA}$
Reverse battery protection:	available (no function, no damage)

Ambient conditions


Temperature:	Operating range:	-20...+80 °C
	Medium:	-50...+250 °C
	Storing:	-40...+100 °C
Condensation:	uncritical	

Mechanics





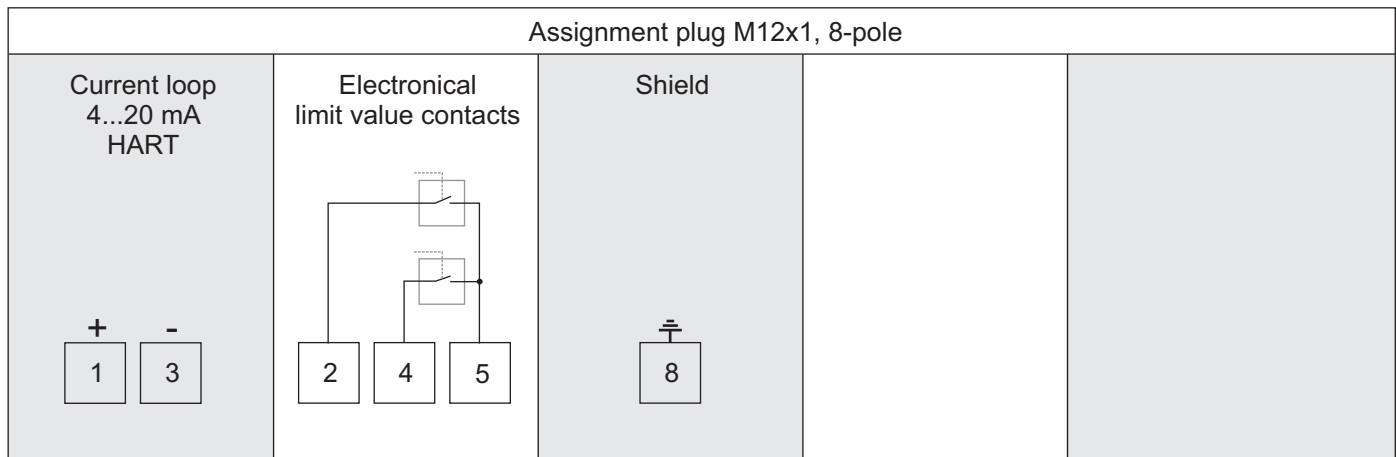


Dimensions:	see page 3		
Process connection:	1/4" / 3/8" / 1/2" / 3/4" / 1" / 1/4NPT / 3/8NPT / 1/2NPT		
Extension:	100 mm (option)		
Electrical connection:	see page 3		
Material:	Protecting tube:	stainless steel 1.4571 (standard 6x0,5 mm)	
	Extension:	stainless steel 1.4571	
	Process connection:	stainless steel 1.4571	
	Body:	PBT GF30	
	Head of display:	polycarbonate (makrolon)	
Weight:	approx. 150 g (70 mm, 1/2", M12)		
Fitting position:	any		
System pressure:	PN 25		
Protection of device:	Ingress protection:	at least IP 65 (electronics)	
	PCB:	potted	

● Connection M12x1-plug (example)

Assignment plug M12x1, 8-pole



● **Electrical connection**

M12x1	Super Seal	Deutsch	Deutsch	Bayonet	Valve	MIL	
							
4-, 5-, 8-pole	3-pole	3-pole	4-pole	4-pole	4-pole	6-pole	

Connection	M12 4-pole	M12 5-pole	M12 8-pole	Bayonet 4-pole	Deutsch 4-pole	Deutsch 3-pole	Super Seal 3-pole	Valve 4-pole	MIL 6-pole
Limit value (LV)									
1 electronical LV	X	X	X	X	X			X	X
2 electronical LV		X	X						X

● **HART Communication**

The HART-Tool is a graphical user interface for the ME series with menu-driven program for configuration. It can be used for putting into operation, configuration, analysis of signals, data backup and documentation of the device.


Operating systems: Windows 2000, Windows XP, Windows 7 and 8.1

Connection via HART interface (modem) with USB interface of a PC or hand-held HART communicator

- Settings:
- Adjustment of output current
 - Simulation of output current
 - Filter function
 - Limits of measuring range
 - Linear output signal
 - HART address
 - 2-point calibration

Please note: When using communication via a HART modem, a communication resistance of 250 Ω has to be taken into account.

● **Dimensions (in mm)**

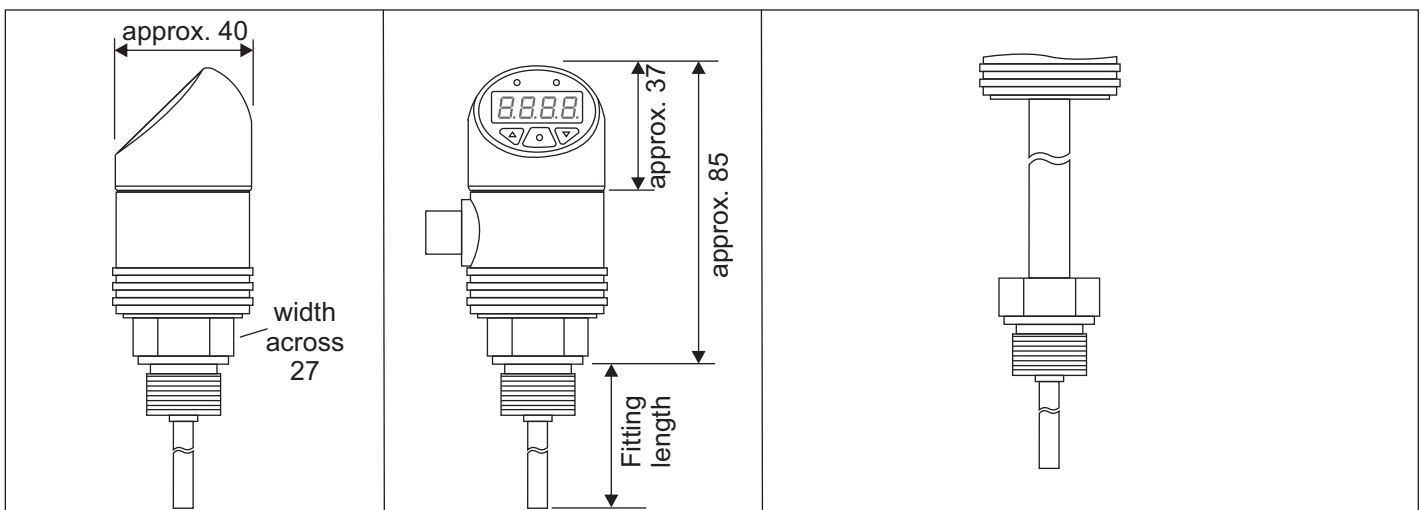

● **Ordering code**

O R X X X X X X - X X X

Input:	RTD Pt100	0													
Sensor type:	Class A	0													
	Class B	1													
	Klasse AA (B 1/3 DIN)	3													
Protecting tube:	Ø6x0,5 mm	0													
	Other protecting tube (to specify)	1													
	Ø6x0,5 mm with extension 100 mm	2													
	Other protecting tube with extension 100 mm (to specify)	3													
Fitting length:	50 mm	0													
	100 mm	1													
	200 mm	2													
	250 mm	3													
	400 mm	4													
	600 mm	5													
	1000 mm	6													
Other length (to specify)	7														
Process connection:	1/4"	0													
	3/8"	1													
	1/2"	2													
	3/4"	3													
	1"	4													
	1/4NPT	5													
	3/8" NPT	6													
1/2" NPT	7														
Limit value contacts:	2x PNP, 30 VDC, 200 mA (standard)	0													
	1x PNP, 30 VDC, 200 mA	1													
	Without	2													
	2x NPN, 30 VDC, 200 mA	3													
	1x NPN, 30 VDC, 200 mA	4													
	2x PNP, 30 VDC, 1000 mA	5													
	1x PNP, 30 VDC, 1000 mA	6													
	2x NPN, 30 VDC, 1000 mA	7													
	1x NPN, 30 VDC, 1000 mA	8													
Electrical connection:	M12, 4-pole	0													
	M12, 5-pole	1													
	M12, 8-pole	2													
	Deutsch DT04, 3-pole	3													
	Deutsch DT04, 4-pole	4													
	Super Seal 1.5, 3-pole	5													
	Bayonet (DIN), 4-pole	6													
	Valve plug, 4-pole	7													
	MIL, 6-pole	9													
Configuration:	Factory setting ¹⁾	0													
	Customized (to specify) ²⁾	1													
Other:	Special model	0													

1) Nominal measuring range: -50...250 °C (LRL...URL) / Measuring range: -50...200 °C (LRV...URV) / Damping: 0 s

2) All settings, which are possible according the technical data, can be selected. For not given values the details of factory-set are used.

Accessories:

Interface HART, USB, software

Order No.: